PROGRAMMABLE DC ELECTRONIC LOAD
MODEL 6310A SERIES

The Chroma 6310A series Programmable DC Electronic Load is ideal for the test and evaluation of multi-output AC/DC power supplies, DC/DC converters, chargers and power electronic components. It is designed for applications in research and development, production, and incoming inspection. The system is configured by plugging the user selectable load modules into the system mainframe. The user interfaces include an ergonomically designed user friendly keypad on the front panel and the following computer interfaces: RS-232C, USB or GPIB.

The 6310A series offers 12 different modules with power ratings from 20 watts to 1,200 watts, current ratings from 0.5mA to 240A, and voltage ratings from 0.5mV to 600V. The loads can be operated in constant current, constant voltage, constant power and constant resistance and may be placed in parallel for increased current and power.

The 6310A series can simulate a wide range of dynamic loading applications. The waveforms programmable parameters include: slew rate, load level, duration and conducting voltage. In addition, up to 100 sets of system operating status can be stored in EEPROM and recalled instantly for automated testing applications.

Real time measurement of voltage and current are integrated into each 6310A load module using a 16-bit precision measurement circuit. The user can perform on line voltage measurements and adjustments or simulate short circuit test using the user friendly keypad on the front panel. Additionally, the 6310A series offers an optional remote controller for automated production lines.

The 6310A series has a self-diagnosis routines to maintain instrument performance. It also provides OC, OP, OT protection, and alarm indicating OV, reverse polarity to guarantee quality and reliability for even in the most demanding engineering testing and ATE applications.

USB GPIB RS-232C CE

MODEL 6310A SERIES

Key Features:

- Max Power: 200W, 100W × 2(Dual), 30W & 250W, 300W, 350W, 600W, 1200W
- Wide range 0~600V operating voltage
- Compatibility between 6310 and 6310A
- Up to eight channels in one mainframe, for testing multiple output SMPS
- Parallel load modules up to 1400W for high current and power applications
- Synchronization with multiple loads
- Flexible CC, CR, CP and CV operation modes
- Dynamic loading with speeds up to 20kHz
- Fast response of 0.32mA/μs ~ 10A/μs slew rate
- Minimum input resistance allows load to sink high current at low voltage (63123A : 0.6V@70A)
- Real time power supply load transient response simulation and output measurements
- User programmable 100 sequences. Front panel input status for user-friendly operation
- High/Low limits of testing parameters to test GO/NG
- Digital I/O control
- Over current protection (OCP) testing function
- 16-bit precision voltage and current measurement with dual-range
- Remote sensing capability
- Short circuit test
- Self-test at power-on
- Full Protection: OC, OP, OT protection and OV, reverse alarm
- USB, GPIB & RS-232C interfaces

Chroma

VERSATILE SYSTEM CONFIGURATION

Chroma 6310A Programmable Electronic Load integrates microprocessor capabilities into each load module and mainframe to provide simple and accurate parallel operation to optimize the speed and control among multiple load modules. All load modules may be configured to work synchronously, to test multiple outputs simultaneously, thus simulating real life applications.

6310A System Block Diagram

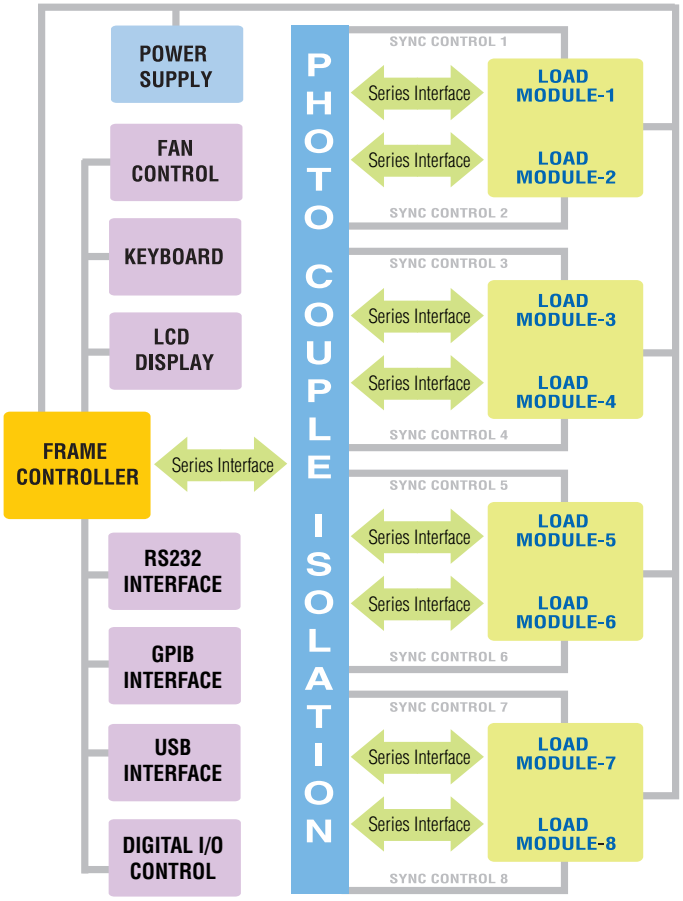

COMPATIBILITY WITH 6310 SERIES

The 6310A series load modules will be compatible with the 6310 series mainframes (6312/6314). In addition, the remote control commands will be compatible between the 6310 and the 6310A series without needing to re-writing any remote control programs.

MODULE LOAD DESIGN

The Chroma 6314A 1400W and 6312A 700W electronic load mainframes accept the user-installable 6310A series load modules for easy system configuration and will mount in a 19" instrument rack. The 6314A holds up to four 63102A load modules, which will result in an 8-channel 100W/channel load with standard front-panel inputs. This makes it ideal for testing multiple output switching power supplies and multiple DC-DC converters. There are also higher wattage modules that may be mixed and matched for an even more versatile system. Additionally, the GO/NG output port is useful for UUT's pass/fail testing on an automated production line. All modules on the 6314A/6312A mainframe share a common GPIB address to synchronize and speed up the control of the load modules and the read-back of data.

APPLICATION OF SPECIFIC LOAD SIMULATION

The 6310A load modules operate in constant current, constant voltage, constant power or constant resistance to satisfy a wide range of test requirements. For example, the test of a battery charger can be simulated easily by setting the load to operate in constant voltage.









Each load module is designed with state-of-the-art technology and connects all the power MOSFET devices in parallel to insure high accuracy load control with a minimum drift of less than 0.1%+0.1%F.S. of the current setting. Chroma's use of FET technology provides minimum input resistance and enables the load to sink high current even at very low voltages. For example, the model 63123A is capable

of sinking 70A at 0.6V, and well-suited for testing the new 3.3V low voltage power supplies. Low voltage operation, down to zero volts, is possible at reduced current levels.

The 6310A load module uses a photo coupler for isolation between the output and control sections, thus each load is isolated and floating. The user can use multiple load modules independently to test multi-output power supplies, or parallel them for high power testing applications.

Model 63123A Input Characteristics

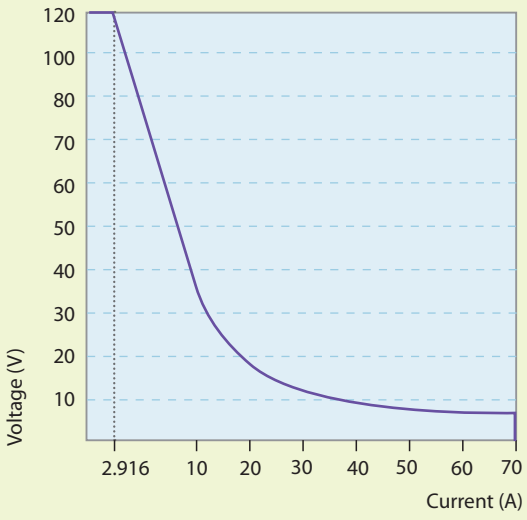

Low Voltage Characteristics (Typical)
Model 63101A/63102A/63103A/63106A/63112A/63123A

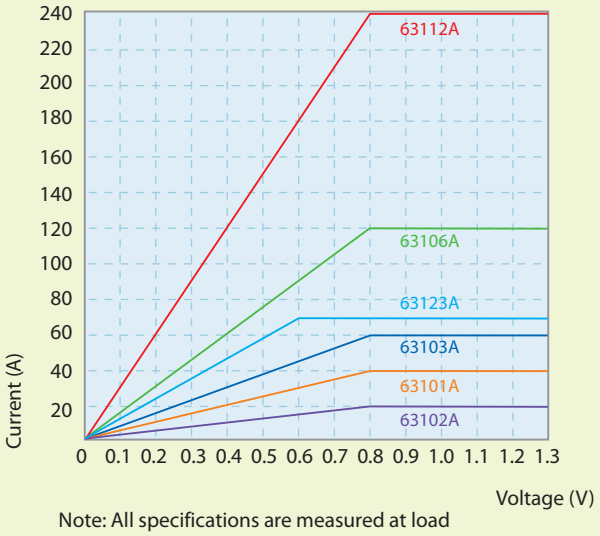

Note: All specifications are measured at load input terminals. (Ambient Temperature of 25˚C)

DYNAMIC LOADING AND CONTROL

Modern electronic devices operate at very high speeds and require fast dynamic operation of their power providing components. To satisfy these testing applications, the 6310A loads offer high speed, programmable dynamic load simulation and control capability. The figure aside shows the programmable parameters of the 6310A modules:

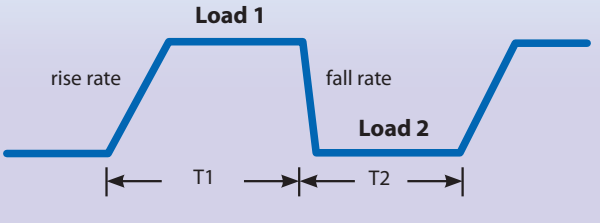

The programmable slew rate makes the simulation of transient load change demanded by real life applications possible. The 6310A internal waveform generator is capable of producing a maximum slew rate at 10A/µs, and dynamic cycling up to 20kHz. It's dedicated remote load sense and control circuit guarantee minimum waveform distortion during continuous load changes.

MULTI-CHANNEL CONTROL

The 6310A comes with RS-232C as standard for remote control and automated testing applications. The USB and GPIB interfaces are available as options. In addition, the 6310A provides an efficient solution for testing single output AC to DC or DC to DC converters by controlling multiple loads. The 6310A provides the capability to test up to 8 UUTs at a time.

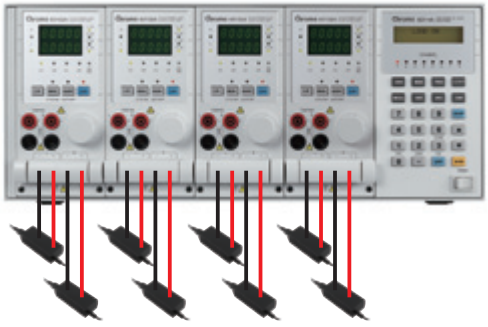

UUT : Adaptor

POWERFUL MEASUREMENTS

Each 6310A load module has an integrated 16-bit precision A/D converter for voltage measurement with an accuracy of 0.025%+0.015%* of full scale. The built-in resistive load current sensing circuit is capable of measuring current with an accuracy of 0.04%+0.04%* of full scale. Apart from voltage and current measurement, 6310A also provides power measurement function and there is no need for users to spend time for power calculation. Also, short circuit can be simulated. All measurements are done using remote sensing to eliminate any error due to voltage drops along the measurement path. The user can also select from a complete set of voltage and current measurements.

Note * : Only for Model 63123A

OCP TEST

Modern switching power supplies are designed with over current protection (OCP) circuitry; therefore, it is important to test the OCP circuitry to make sure it is functioning within its designed specifications. The 6310A series provides an easy and fast solution for this testing.

By simply choosing the channel and setting the OCP parameters (start current, end current, step current and dwell time) from the front panel, the 6310A series provides a fast and easy OCP testing solution. The 6310A series will automatically detect the OCP point, making it an ideal solution for design verification as well as production line testing.

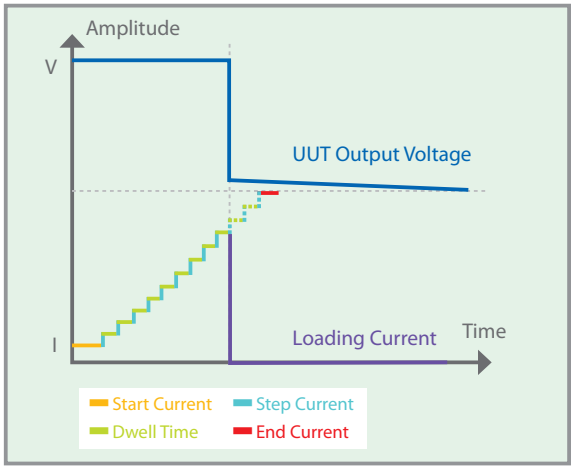

TIMING FUNCTION

The 6310A series of loads include a unique timing & measurement function, which allows precise time measurements in the range of 1ms to 86,400s. This feature allows the user to set the final voltage & timeout values for battery discharge testing, super capacitor discharge, and other similar applications.

For example, the figure on the right shows the 6310A internal timer starting at Load ON, and ending when the battery voltage reaches the final voltage.

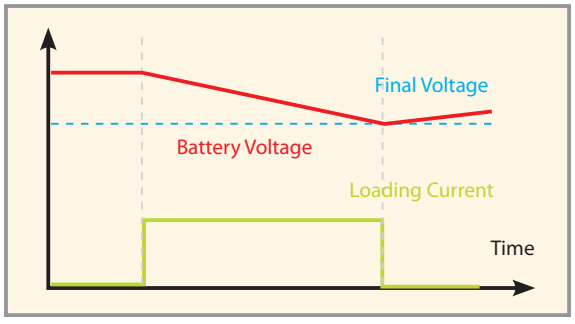

Battery Discharge Testing

DIGITAL I/O

The digital I/O interface makes the 6310A DC Load the ideal choice for automated testing requirements. Through the digital I/O, the 6310A can accept digital signals to trigger its functions (Load On/Off, OCP test, etc.) as well as current output status signals.

Pin	Definition		
Pin 1	Reserved	Pin 9	Short Signal (O/P)
Pin 2	DGND	Pin 10	Protection Signal (O/P)
Pin 3	DGND	Pin 11	External Load ON/OFF (I/P)
Pin 4	DGND	Pin 12	Reserved
Pin 5	DGND	Pin 13	Reserved
Pin 6	Load ON/OFF (O/P)	Pin 14	DGND
Pin 7	Total Pass (O/P)	Pin 15	External Trig. For Sequences Run (I/P)
Pin 8	Total Fail (O/P)		

6310A SERIES PROGRAMMABLE DC ELECTRONIC LOAD FAMILY

6314A : 4 in 1 Mainframe

6312A : 2 in 1 Mainframe

A631001:
Remote Controller

A631000 :
GPIB Interface

A631003 :
USB Interface

Mainframe Model	6312A	6314A
Number of slots	2	4
Operating Temperature	0~40˚C	0~40˚C
Input Rating	1Ø 100/200Vac ± 10% V_{LN}, 47~63Hz ; 1Ø 115/230Vac ± 10% V_{LN}, 47~63Hz	1Ø 100/200Vac ± 10% V_{LN}, 47~63Hz ; 1Ø 115/230Vac ± 10% V_{LL}, 47~63Hz
Dimensions (HxWxD)	194x275x550mm / 7.6x10.8x21.7inch	194x439x550mm / 7.6x17.3x21.7inch
Weight	15 kg / 33.1 lbs	21.5 kg / 47.4 lbs

LED LOAD SIMULATOR

As a constant current source, the LED power driver has an output voltage range with a constant output current. LED power drivers are usually tested in one of the following ways :

1. With LEDs
2. Using resistors for loading
3. Using Electronic Loads in Constant Resistance (CR) mode, or Constant Voltage (CV) mode

However, all these testing methods, each of them has their own disadvantages.

As shown on the V-I curve in Figure 1, the LED has a forward voltage VF and a operating resistance (Rd). When using a resistor as loading, the V-I curve of the resistor is not able to simulate the V-I curve of the LED as shown in blue on Figure 1. This may cause the LED power driver to not start up due to the difference in V-I characteristic between the resistors and the LEDs. When using Electronic Loads, the CR and CV mode settings are set for when the LED is under stable operation and therefore, is unable to simulate turn on or PWM brightness control characteristics. This may cause the LED power driver to function improperly or trigger it's protection circuits. These testing requirements can be achieved when using a LEDs as a load; however, issues regarding the LED aging as well as different LED power drivers may require different types of LEDs or a number of LEDs. This makes it inconvenient for mass production testing.

Chroma has created the industries first LED Load Simulator for simulating LED loading with our 63110A load model from our 6310A series Electronic Loads. By setting the LED power driver's output voltage, and current, the Electronic Load can simulate the LED's loading characteristics. The LED's forward voltage and operating resistance can also be set to further adjust the loading current and ripple current to better simulate LED characteristics. The 63110A design also has increased bandwidth to allow for PWM dimming testing.

Figure 4 shows the dimming current waveform of the LED.

Figure 5 shows the dimming current waveform when using 63110A as a load.

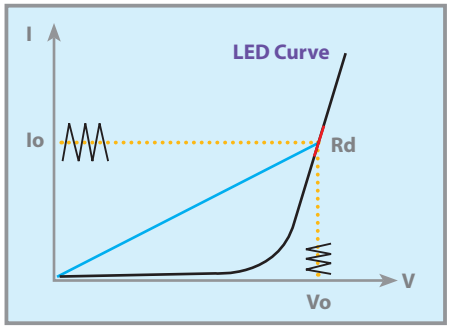

Figure 1 - LED V-I characteristics

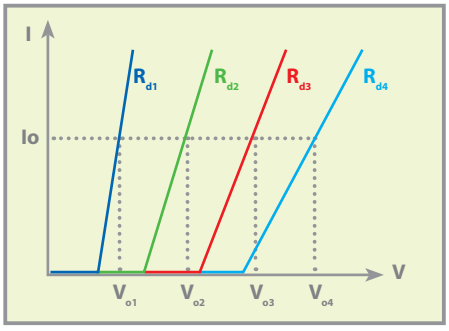

Figure 2 - Simulate different number of LEDs

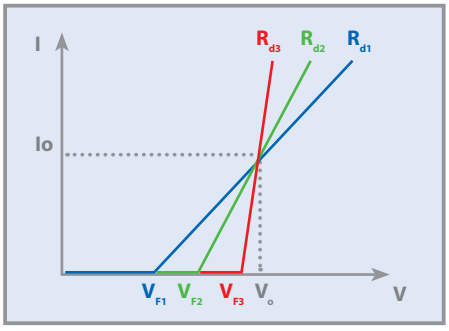

Figure 3 - Simulate different characteristic of LEDs

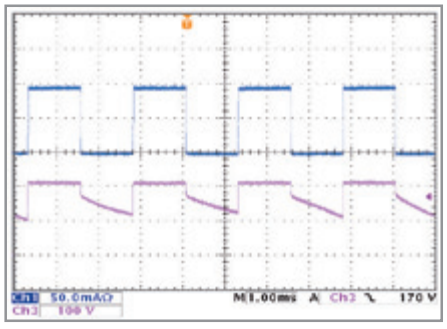

Figure 4 - LED dimming test

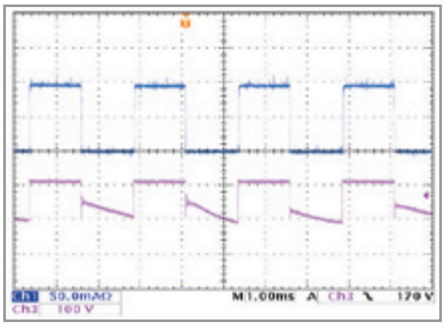

Figure 5 - 63110A dimming test

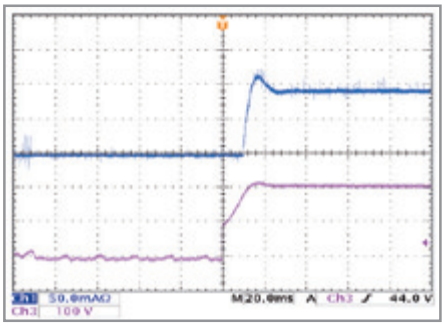

Figure 6 - LED driver turn-on waveform

PANEL DESCRIPTION

Load Module

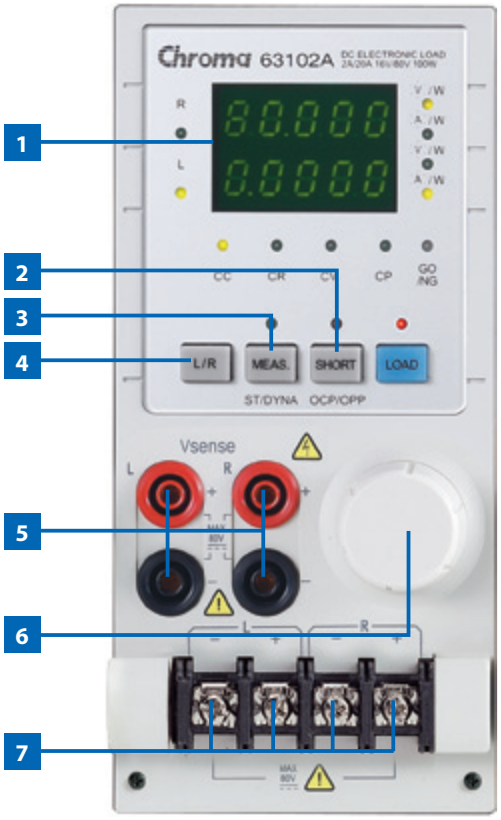

Mainframe Controller

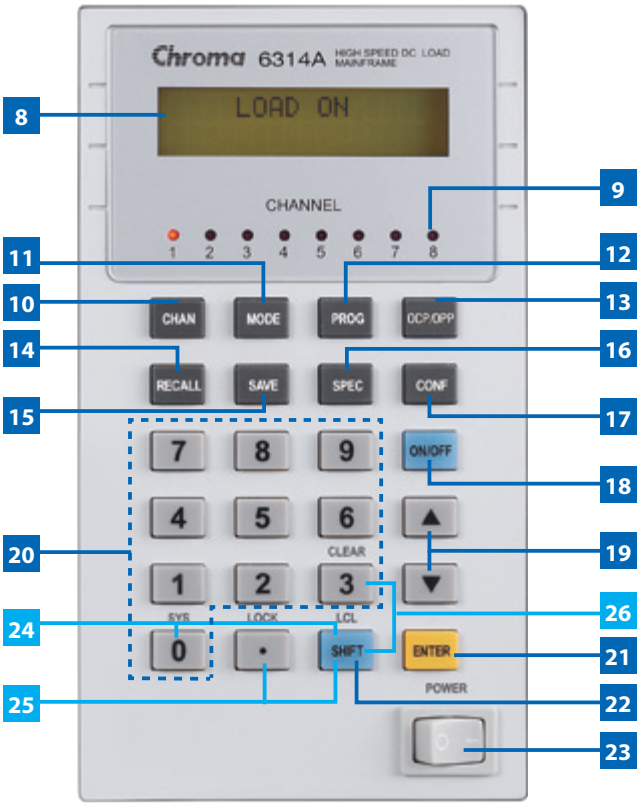

Rear Panel

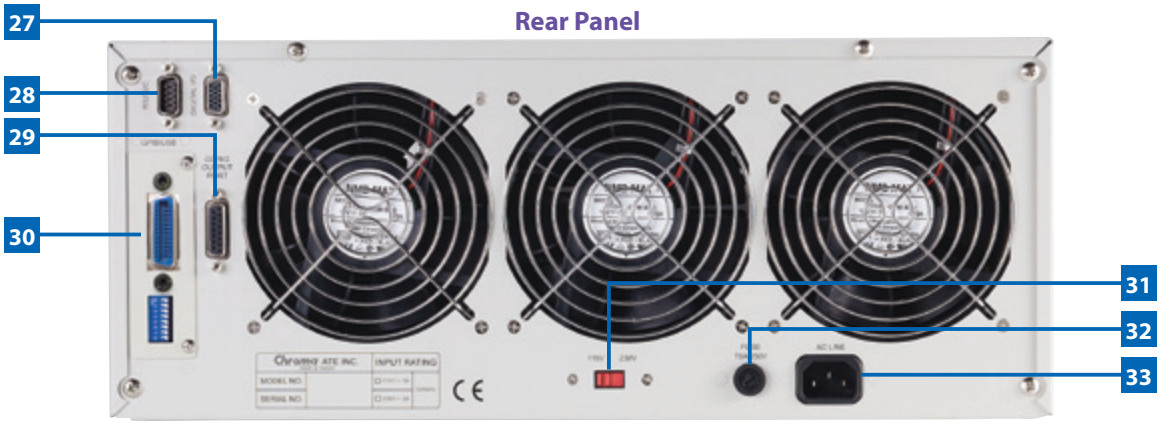

1. **LED indicator**
2. **SHORT key :** To apply a short circuit across the input
3. **STATIC/DYNA key :** To select static or dynamic test mode
4. **L/R key :** To select left or right channel of input load(63102A, 63107A)
   A/B key : To select static A or B load (other models)
5. **V terminal :** To measure the UUT's output voltage using remote sense
6. **Rotary knob :** To adjust load setting continuously
7. **Load terminal**
8. **LCD display**
9. **LED indicator :** To display the channel at which load is set
10. **CHAN key :** To select input load channel
11. **MODE key :** To select the operation mode of CC, CR, CV or CP
12. **PROG key :** For program data setting
13. **OCP/OPP key :** Over current protection/Over power protection testing
14. **RECALL key :** To recall the front panel input status from memory
15. **SAVE key :** To save the front panel input status into memory
16. **SPEC key :** To set up High/Low limits for GO/NG test
17. **CONF key :** To set the configuration
18. **ON/OFF key :** To enable or disable the load input
19. **Up/Down key :** To select the next or previous display in edit mode
20. **Numeric key :** For data setting
21. **ENTER key :** To confirm editing data on the instrument
22. **SHIFT key :** As LOCAL key when in remote mode
23. **Power switch**
24. **SHIFT + 0 key :** System function
25. **SHIFT + . key :** Lock function
26. **SHIFT + 3 key :** Clear the currently edited data
27. **Digital I/O :** Used for system input/output control signals
28. **RS-232C connector**
29. **GO/NG output port**
30. **GPIB or USB slot**
31. **AC input voltage switch**
32. **AC input fuse**
33. **AC input connector**

SPECIFICATIONS-LED LOAD SIMULATOR

Model	63110A (100Wx2)		63113A		63115A *3	
Power	100W		300W		300W	
Current	0~0.6A	0~2A	0~5A	0~20A	0~5A	0~20A
Voltage *1	0~500V		0~300V		0~600V	
Min. Operating Voltage	6V@2A		4V@20A		4V@20A	
Constant Current Mode						
Range	0~0.6A	0~2A	0~5A	0~20A	0~5A	0~20A
Resolution	12μA	40μA	100μA	400μA	100μA	400μA
Accuracy	0.1%+0.1% F.S.		0.1%+0.1% F.S.	0.1%+0.2% F.S.	0.1%+0.1% F.S.	0.1%+0.2% F.S.
Constant Resistance Mode						
Range	CRL : 3Ω~1kΩ (100W/100V) CRH : 10Ω~10kΩ (100W/500V)		CRL @ CH : 0.2Ω~200Ω (300W/60V) CRL @ CL : 0.8Ω~800Ω (300W/60V) CRH @ CL : 4Ω~4kΩ (300W/300V)		CRL @ CH : 0.2Ω~200Ω (300W/60V) CRL @ CL : 0.8Ω~800Ω (300W/60V) CRH @ CL : 8Ω~8kΩ (300W/600V)	
Resolution*2	CRL : 62.5μS CRH : 6.25μS		CRL @ CH : 100μS CRL @ CL : 25μS CRH @ CL : 5μS		CRL @ CH :100μS CRL @ CL : 25μS CRH @ CL : 2.5μS	
Accuracy	1kΩ : 4mS+0.2% 10kΩ : 1mS+0.1%		0.2% (setting + range)		0.2% (setting + range)	
Constant Voltage Mode						
Range	0~500V		0~300V		0~600V	
Resolution	20mV		6mV		12mV	
Accuracy	0.05% + 0.1%F.S.		0.05% + 0.1%F.S.		0.05% + 0.1%F.S.	
LED Mode						
Range	Operating Voltage: 0~100V/0~500V R_d Coefficient : 0.001~1 V_F: 0~100V/0~500V Current : 0~2A R_d: 1Ω~1kΩ/10Ω~10kΩ		Operating Voltage : 0~60V/0~300V R_d Coefficient : 0.001~1 V_F : 0~60V/0~300V LEDL @ CH : 0~60V- 0~20A (R_d: 0.05Ω~50Ω) LEDL @ CL : 0~60V- 0~5A (R_d: 0.8Ω~800Ω) LEDH @ CL : 0~300V- 0~5A (R_d: 4Ω~4kΩ)		Operating Voltage : 0~60V/0~600V R_d Coefficient : 0.001~1 V_F : 0~60V/0~600V LEDL @ CH : 0~60V- 0~20A (R_d: 0.05Ω~50Ω) LEDL @ CL : 0~60V- 0~5A (R_d: 0.8Ω~800Ω) LEDH @ CL : 0~600V- 0~5A (R_d: 8Ω~8kΩ)	
Resolution *2	Vo : 4mV/20mV Io : 0.1mA R_d Coefficient : 0.001 R_d: 62.5μS/6.25μS V_F : 4mV/20mV		Vo : 1.2mV/6mV Io : 100μA/400μA R_d Coefficient : 0.001 R_d : 400μS / 25μS / 5μS V_F : 1.2mV/ 6mV		Vo : 1.2mV/12mV Io : 100μA/400μA R_d Coefficient : 0.001 R_d : 400μS/25mS/2.5mS V_F : 6mV/ 60mV	
Dynamic Mode						
Dynamic Mode	--		C.C. Mode		C.C. Mode	
T1 & T2	--		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms	
Accuracy	--		1μs/1ms+100ppm		1μs/1ms+100ppm	
Slew Rate	--		0.8~200mA/μs	3.2~800mA/μs	0.8~200mA/μs	3.2~800mA/μs
Resolution	--		0.8mA/μs	3.2mA/μs	0.8mA/μs	3.2mA/μs
Accuracy	--		10% ±20μs		10% ±20μs	
Min. Rise Time	--		25μs (Typical)		25μs (Typical)	
Current	--		0~5A	0~20A	0~5A	0~20A
Resolution	--		100μA	400μA	100μA	400μA
Accuracy	--		0.4%F.S.		0.4%F.S.	
Measurement Section						
Voltage Read Back						
Range	0~100V	0~500V	0~60V	0~300V	0~60V	0~600V
Resolution	2mV	10mV	1.2mV	6mV	1.2mV	12mV
Accuracy	0.025%+0.025% F.S.		0.025%+0.025% F.S.		0.025%+0.025% F.S.	
Current Read Back						
Range	0~0.6A	0~2A	0~5A	0~20A	0~5A	0~20A
Resolution	12μA	40μA	100μA	400μA	100μA	400μA
Accuracy	0.05%+0.05% F.S.		0.05%+0.05% F.S.		0.05%+0.05% F.S.	

NOTE*1 : If the operating voltage exceeds 1.1 times of the rated voltage, it would cause permanent damage to the device.
NOTE*2 : S (siemens) is the SI unit of conductance, equal to one reciprocal ohm.
NOTE*3 : Call for availability

SPECIFICATIONS-1

Model	63101A		63102A (100Wx2)		63103A	
Power	20W	200W	20W	100W	30W	300W
Current	0~4A	0~40A	0~2A	0~20A	0~6A	0~60A
Voltage *3	0~80V		0~80V		0~80V	
Typical Min. Operation Voltage (DC)*1	0.4V@2A 0.8V@4A	0.4V@20A 0.8V@40A	0.4V@1A 0.8V@2A	0.4V@10A 0.8V@20A	0.4V@3A 0.8V@6A	0.4V@30A 0.8V@60A
Constant Current Mode						
Range	0~4A	0~40A	0~2A	0~20A	0~6A	0~60A
Resolution	1mA	10mA	0.5mA	5mA	1.5mA	15mA
Accuracy	0.1%+0.1%F.S.	0.1%+0.2%F.S.	0.1%+0.1%F.S.	0.1%+0.2%F.S.	0.1%+0.1%F.S.	0.1%+0.2%F.S.
Constant Resistance Mode						
Range	0.0375Ω~150Ω (200W/16V) 1.875Ω~7.5kΩ (200W/80V)		0.075Ω~300Ω (100W/16V) 3.75Ω~15kΩ (100W/80V)		0.025Ω~100Ω (300W/16V) 1.25Ω~5kΩ (300W/80V)	
Resolution*5	6.667mS (200W/16V) 133μS (200W/80V)		3.333mS (100W/16V) 66.667μS (100W/80V)		10mS (300W/16V) 200μS (300W/80V)	
Accuracy	150Ω: 0.1S+ 0.2% 7.5kΩ: 0.01S + 0.1%		300Ω: 0.1S + 0.2% 15kΩ: 0.01S + 0.1%		100Ω: 0.1S+ 0.2% 5kΩ: 0.01S+ 0.1%	
Constant Voltage Mode						
Range	0~80V		0~80V		0~80V	
Resolution	20mV		20mV		20mV	
Accuracy	0.05% + 0.1%F.S.		0.05% + 0.1%F.S.		0.05% + 0.1%F.S.	
Constant Power Mode						
Range	0~20W	0~200W	0~20W	0~100W	0~30W	0~300W
Resolution	5mW	50mW	5mW	25mW	7.5mW	75mW
Accuracy	0.5% + 0.5%F.S.		0.5% + 0.5%F.S.		0.5% + 0.5%F.S.	
Dynamic Mode						
Dynamic Mode	C.C. Mode		C.C. Mode		C.C. Mode	
T1 & T2	0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms	
Accuracy	1μs/1ms+100ppm		1μs/1ms+100ppm		1μs/1ms+100ppm	
Slew Rate	0.64~160mA/μs	6.4~1600mA/μs	0.32~80mA/μs	3.2~800mA/μs	0.001~0.25A/μs	0.01~2.5A/μs
Resolution	0.64mA/μs	6.4mA/μs	0.32mA/μs	3.2mA/μs	0.001A/μs	0.01A/μs
Accuracy	10% ±20μs		10% ±20μs		10% ±20μs	
Min. Rise Time	10μs (Typical)		10μs (Typical)		10μs (Typical)	
Current	0~4A	0~40A	0~2A	0~20A	0~6A	0~60A
Resolution	1mA	10mA	0.5mA	5mA	1.5mA	15mA
Accuracy	0.4%F.S.		0.4%F.S.		0.4%F.S.	
Measurement Section						
Voltage Read Back						
Range	0~16V	0~80V	0~16V	0~80V	0~16V	0~80V
Resolution	0.25mV	1.25mV	0.25mV	1.25mV	0.25mV	1.25mV
Accuracy	0.025% + 0.025%F.S.		0.025% + 0.025%F.S.		0.025% + 0.025%F.S.	
Current Read Back						
Range	0~4A	0~40A	0~2A	0~20A	0~6A	0~60A
Resolution	0.0625mA	0.625mA	0.03125mA	0.3125mA	0.09375mA	0.9375mA
Accuracy	0.05% + 0.05%F.S.		0.05% + 0.05%F.S.		0.05% + 0.05%F.S.	
Power Read Back*2						
Range	0~20W	0~200W	0~20W	0~100W	0~30W	0~300W
Accuracy	0.1% + 0.1%F.S.		0.1% + 0.1%F.S.		0.1% + 0.1%F.S.	
Protective Section						
Over Power Protection	Yes		Yes		Yes	
Over Current Protection	Yes		Yes		Yes	
Over Temperature Protection	Yes		Yes		Yes	
Over Voltage Alarm*3	Yes		Yes		Yes	
General						
Short Circuit						
Current (CC)	-	≒40A	-	≒20A	-	≒60A
Voltage (CV)	-	0V	-	0V	-	0V
Resistance (CR)	-	≒0.0375Ω	-	≒0.075Ω	-	≒0.025Ω
Power (CP)	-	≒200W	-	≒100W	-	≒300W
Input Resistance (Load Off)	100kΩ (Typical)		100kΩ (Typical)		100kΩ (Typical)	
Temperature Coefficient	100PPM/°C (Typical)		100PPM/°C (Typical)		100PPM/°C (Typical)	
Power	Supply from 6314A Mainframe		Supply from 6314A Mainframe		Supply from 6314A Mainframe	
Dimensions (HxWxD)	172x82x489.5mm / 6.8x3.2x19.3inch		172x82x489.5mm / 6.8x3.2x19.3inch		172x82x489.5mm / 6.8x3.2x19.3inch	
Weight	4.2 kg / 9.3 lbs		4.2 kg / 9.3 lbs		4.2 kg / 9.3 lbs	
Operating Temperature Range	0~40°C		0~40°C		0~40°C	
EMC & Safety	CE		CE		CE	

• Continued on next page ➟

SPECIFICATIONS-2

Model	63105A		63106A		63107A (30W & 250W)		
Power	30W	300W	60W	600W	30W	30W	250W
Current	0~1A	0~10A	0~12A	0~120A	0~5A	0~4A	0~40A
Voltage*3	0~500V		0~80V		0~80V		
Typical Min. Operation Voltage (DC)*1	1.0V@0.5A 2.0V@1A	1.0V@5A 2.0V@10A	0.4V@6A 0.8V@12A	0.4V@60A 0.8V@120A	0.4V@2.5A 0.8V@5A	0.4V@2A 0.8V@4A	0.4V@20A 0.8V@40A
Constant Current Mode							
Range	0~1A	0~10A	0~12A	0~120A	0~5A	0~4A	0~40A
Resolution	0.25mA	2.5mA	3mA	30mA	1.25mA	1mA	10mA
Accuracy	0.1%+0.1%F.S.	0.1%+0.2%F.S.	0.1%+0.1%F.S.	0.1%+0.2%F.S.	0.1%+0.1%F.S.	0.1%+0.1%F.S.	0.1%+0.2%F.S.
Constant Resistance Mode							
Range	1.25Ω~5kΩ (300W/125V) 50Ω~200kΩ (300W/500V)		12.5mΩ~50Ω (600W/16V) 0.625Ω~2.5kΩ (600W/80V)		0.3Ω~1.2kΩ (30W/16V) 15Ω~60kΩ (30W/80V)		0.0375Ω~150Ω (250W/16V) 1.875Ω~7.5kΩ (250W/80V)
Resolution*5	200μS (300W/125V) 5μS (300W/500V)		20mS (600W/16V) 400μS (600W/80V)		833μS (30W/16V) 16.67μS (30W/80V)		6.667μS (250W/16V) 133μS (250W/80V)
Accuracy	5kΩ: 20mS+ 0.2% 200kΩ:5mS+ 0.1%		50Ω: 0.4S + 0.5% 2.5kΩ: 0.04S + 0.2%		1.2kΩ: 0.1S + 0.2% 60kΩ: 0.01S + 0.1%		150Ω: 0.1S + 0.2% 7.5kΩ: 0.01S + 0.1%
Constant Voltage Mode							
Range	0~500V		0~80V		0~80V		
Resolution	125mV		20mV		20mV		
Accuracy	0.05% + 0.1%F.S.		0.05% + 0.1%F.S.		0.05% + 0.1%F.S.		
Constant Power Mode							
Range	0~30W	0~300W	0~60W	0~600W	0~30W	0~30W	0~250W
Resolution	7.5mW	75mW	15mW	150mW	7.5mW	7.5mW	62.5mW
Accuracy	0.5% + 0.5%F.S.		0.5% + 0.5%F.S.		0.5% + 0.5%F.S.		
Dynamic Mode							
Dynamic Mode	C.C. Mode		C.C. Mode		C.C. Mode		
T1 & T2	0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		
Accuracy	1μs/1ms+100ppm		1μs/1ms+100ppm		1μs/1ms+100ppm		
Slew Rate	0.16~40mA/μs	1.6~400mA/μs	0.002~0.5A/μs	0.02~5A/μs	0.8~200mA/μs	0.64~160mA/μs	6.4~1600mA/μs
Resolution	0.16mA/μs	1.6mA/μs	0.002A/μs	0.02A/μs	0.8mA/μs	0.64mA/μs	6.4mA/μs
Accuracy	10% ±20μs		10% ±20μs		10% ±20μs		
Min. Rise Time	24μs (Typical)		10μs (Typical)		10μs (Typical)		
Current	0~1A	0~10A	0~12A	0~120A	0~5A	0~4A	0~40A
Resolution	0.25mA	2.5mA	3mA	30mA	1.25mA	1mA	10mA
Accuracy	0.4%F.S.		0.4%F.S.		0.4%F.S.		
Measurement Section							
Voltage Read Back							
Range	0~125V	0~500V	0~16V	0~80V	0~16V	0~80V	0~16V / 0~80V
Resolution	2mV	8mV	0.25mV	1.25mV	0.25mV	1.25mV	0.25mV / 1.25mV
Accuracy	0.025% + 0.025%F.S.		0.025% + 0.025%F.S.		0.025% + 0.025%F.S.		
Current Read Back							
Range	0~1A	0~10A	0~12A	0~120A	0~5A	0~4A	0~40A
Resolution	0.016mA	0.16mA	0.1875mA	1.875mA	0.078125mA	0.0625mA	0.625mA
Accuracy	0.05% + 0.05%F.S.		0.05% + 0.05%F.S.		0.05% + 0.05%F.S.		
Power Read Back*2							
Range	0~30W	0~300W	0~60W	0~600W	0~30W	0~30W	0~250W
Accuracy	0.1% + 0.1%F.S.		0.1% + 0.1%F.S.		0.1% + 0.1%F.S.		
Protective Section							
Over Power Protection	Yes		Yes		Yes		
Over Current Protection	Yes		Yes		Yes		
Over Temperature Protection	Yes		Yes		Yes		
Over Voltage Alarm*3	Yes		Yes		Yes		
General							
Short Circuit							
Current (CC)	-	≒10A	-	≒120A	-	-	≒40A
Voltage (CV)	-	0V	-	0V	-	-	0V
Resistance (CR)	-	≒1.25Ω	-	≒0.0125Ω	-	-	≒0.0375Ω
Power (CP)	-	≒300W	-	≒600W	-	-	≒250W
Input Resistance (Load Off)	100kΩ (Typical)		100kΩ (Typical)		100kΩ (Typical)		
Temperature Coefficient	100PPM/˚C (Typical)		100PPM/˚C (Typical)		100PPM/˚C (Typical)		
Power	Supply from 6314A Mainframe		Supply from 6314A Mainframe		Supply from 6314A Mainframe		
Dimensions (HxWxD)	172x82x489.5mm / 6.8x3.2x19.3inch		172x164x489.5mm / 6.8x6.5x19.3inch		172x82x489.5mm / 6.8x3.2x19.3inch		
Weight	4.2 kg / 9.3 lbs		7.3 kg / 16.1 lbs		4.5 kg / 9.9 lbs		
Operating Temperature Range	0~40˚C		0~40˚C		0~40˚C		
EMC & Safety	CE		CE		CE		

NOTE*1 : Low voltage operation, under 0.8 volt, is possible at correspondingly reduced current level. Operating temperature range is 0˚C to 40˚C.

All specifications apply for 25˚C±5˚C, except as noted

NOTE*2 : Power F.S. = Vrange F.S. x Irange F.S.

SPECIFICATIONS-3

Model	63108A		63112A		63123A	
Power	60W	600W	120W	1200W	350W	
Current	0~2A	0~20A	0~24A	0~240A	0~7A	0~70A
Voltage*3	0~500V		0~80V		0~120V	
Typical Min. Operation Voltage (DC)*1	1.0V@1A	1.0V@10A	0.4V@12A	0.4V@120A	0.05V@3.5A	0.3V@35A
	2.0V@2A	2.0V@20A	0.8V@24A	0.8V@240A	0.1V@7A	0.6V@70A
Constant Current Mode						
Range	0~2A	0~20A	0~24A	0~240A	0~7A	0~70A
Resolution	0.5mA	5mA	6mA	60mA	0.125mA	1.25mA
Accuracy	0.1%+0.1%F.S.	0.1%+0.2%F.S.	0.1%+0.1%F.S.	0.1%+0.2%F.S.	0.1%+0.1%F.S.	0.1%+0.1%F.S.
Constant Resistance Mode						
Range	0.625Ω~2.5kΩ (600W/125V) 25Ω~100kΩ (600W/500V)		6.25mΩ~25Ω (1200W/16V) 0.3125Ω~1.25kΩ (1200W/80V)		0.015Ω~150Ω (350W/24V)*4 2Ω~2kΩ (350W/120V)	
Resolution*5	400μS (600W/125V) 10μS (600W/500V)		40mS (1200W/16V) 800μS (1200W/80V)		1.33mS (350W/24V)*4 10μS (350W/120V)	
Accuracy	2.5kΩ: 50mS + 0.2% 100kΩ: 5mS + 0.1%		25Ω: 0.8S + 0.8% 1.25kΩ: 0.08S + 0.2%		150Ω: 67mS + 0.1% 2kΩ: 5mS + 0.2%	
Constant Voltage Mode						
Range	0~500V		0~80V		0~120V	
Resolution	125mV		20mV		2mV	
Accuracy	0.05% + 0.1%F.S.		0.05% + 0.1%F.S.		0.05% + 0.1%F.S.	
Constant Power Mode						
Range	0~60W	0~600W	0~120W	0~1200W	0~35W	0~350W
Resolution	15mW	150mW	30mW	300mW	2.5mW	25mW
Accuracy	0.5% + 0.5%F.S.		0.5% + 0.5%F.S.		0.5% + 0.5%F.S.	
Dynamic Mode						
Dynamic Mode	C.C. Mode		C.C. Mode		C.C. MODE	
T1 & T2	0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms~50ms/Res: 5μs 0.1ms～500ms / Res: 25μs 10ms～50s / Res: 2.5ms	
Accuracy	1μs/1ms+100ppm		1μs/1ms+100ppm		1μs /1ms+100ppm	
Slew Rate	0.32~80mA/μs	3.2~800mA/μs	0.004~1A/μs	0.04~10A/μs	0.001~0.25A/μs	0.01~2.5A/μs
Resolution	0.32mA/μs	3.2mA/μs	0.004A/μs	0.04A/μs	0.001A/μs	0.01A/μs
Accuracy	10% ±20μs		10% ±20μs		10% ±20μs	
Min. Rise Time	24μs (Typical)		10μs (Typical)		25μs (Typical) *6	
Current	0~2A	0~20A	0~24A	0~240A	0~7A	0~70A
Resolution	0.5mA	5mA	6mA	60mA	0.125mA	1.25mA
Accuracy	0.4%F.S.		0.4%F.S.		0.1% F.S.	
Measurement Section						
Voltage Read Back						
Range	0~125V	0~500V	0~16V	0~80V	0~24V	0~120V
Resolution	2mV	8mV	0.25mV	1.25mV	0.4mV	2mV
Accuracy	0.025% + 0.025%F.S.		0.025% + 0.025%F.S.		0.025%+0.015% F.S.	
Current Read Back						
Range	0~2A	0~20A	0~24A	0~240A	0~7A	0~70A
Resolution	0.03125mA	0.3125mA	0.375mA	3.75mA	0.125mA	1.25mA
Accuracy	0.05% + 0.05%F.S.		0.075% + 0.075%F.S.		0.04%+0.04% F.S.	
Power Read Back*2						
Range	0~60W	0~600W	0~120W	0~1200W	0~35W	0~350W
Accuracy	0.1% + 0.1%F.S.		0.1% + 0.1%F.S.		0.1%+0.1% F.S.	
Protective Section						
Over Power Protection	Yes		Yes		Yes	
Over Current Protection	Yes		Yes		Yes	
Over Temperature Protection	Yes		Yes		Yes	
Over Voltage Alarm*3	Yes		Yes		Yes	
General						
Short Circuit						
Current (CC)	-	≒20A	-	≒240A	-	≒70A
Voltage (CV)	-	0V	-	0V	-	0V
Resistance (CR)	-	≒0.625Ω	-	≒0.00625Ω	-	≒ 0.01Ω
Power (CP)	-	≒600W	-	≒1200W	-	≒350W
Input Resistance (Load Off)	100kΩ (Typical)		100kΩ (Typical)		800kΩ (Typical)	
Temperature Coefficient	100PPM/˚C (Typical)		100PPM/˚C (Typical)		100PPM/˚C (Typical)	
Power	Supply from 6314A Mainframe		Supply from 6314A Mainframe		Supply from 6314A Mainframe	
Dimensions (HxWxD)	172x164x489.5mm / 6.8x6.5x19.3inch		172x329x495mm / 6.8x12.9x19.5inch		172x82x489.5mm / 6.8x3.2x19.3inch	
Weight	7.3 kg / 16.1 lbs		14 kg / 30.8 lbs		4.2kg / 9.3 lbs	
Operating Temperature Range	0~40˚C		0~40˚C		0~40˚C	
EMC & Safety	CE		CE		CE	

NOTE*3 : When the operating voltage exceeds the rated voltage for 1.02 times, a warning will occur and if it exceeds 1.1 times of the rated voltage, it would cause permanent damage to the device.

NOTE*4 : Please refer to user's manual for detail specifications.

NOTE*5 : S (siemens) is the SI unit of conductance, equal to one reciprocal ohm.

NOTE*6 : The loading current should be 0.35A at least.

SOFTPANEL

The 6310A loads can be operated from the front panel controls of mainframe or from available softpanels. This user friendly software includes all functions of 6310A and is easy to understand and operate. The 6310A can be controlled via GPIB and USB interfaces for remote control and automated testing applications.

LED Mode

Dynamic Test

Battery Test

Charger Test

ORDERING INFORMATION

6312A : Mainframe for 2 Load Modules

6314A : Mainframe for 4 Load Modules

63101A : Load Module 80V/40A/200W

63102A : Load Module 80V/20A/100W x 2

63103A : Load Module 80V/60A/300W

63105A : Load Module 500V/10A/300W

63106A : Load Module 80V/120A/600W

63107A : Load Module 80V/5A & 40A/30W & 250W

63108A : Load Module 500V/20A/600W

63112A : Load Module 80V/240A/1200W

63123A : Load Module 120V/70A/350W

A631000 : GPIB Interface for Model 6314A/6312A Mainframe

A631001 : Remote Controller

A631003 : USB Interface for Model 6314A/6312A Mainframe

A631005 : Softpanel for 6310A/6330A series

A631006 : Rack Mounting Kit for Model 6312A Mainframe

A631007 : Rack Mounting Kit for Model 6314A Mainframe

A800042 : Test Fixture

LED Load Simulator for LED Driver Test

63110A : Load Module 500V/2A/100W x 2

63113A : Load Module 300V/20A/300W

*** 63115A :** Load Module 600V/20A/300W

* Call for availability

Developed and Manufactured by :
CHROMA ATE INC.
致茂電子股份有限公司
HEADQUARTERS
66 Hwaya 1st Rd., Kueishan
Hwaya Technology Park,
Taoyuan County 33383,
Taiwan
Tel: +886-3-327-9999
Fax: +886-3-327-8898
http://www.chromaate.com
E-mail: info@chromaate.com

CHINA
CHROMA ELECTRONICS (SHENZHEN) CO., LTD.
8F, No.4, Nanyou Tian An
Industrial Estate, Shenzhen,
China PC: 518052
Tel: +86-755-2664-4598
Fax: +86-755-2641-9620

JAPAN
CHROMA JAPAN CORP.
472 Nippa-cho, Kouhoku-ku,
Yokohama-shi, Kanagawa,
223-0057 Japan
Tel: +81-45-542-1118
Fax: +81-45-542-1080
http://www.chroma.co.jp
E-mail: info@chromaate.com

U.S.A.
CHROMA SYSTEMS SOLUTIONS, INC.
19772 Pauling, Foothill Ranch,
CA 92610
Tel: +1-949-600-6400
Fax: +1-949-600-6401
http://www.chromausa.com
E-mail: sales@chromausa.com

EUROPE
CHROMA ATE EUROPE B.V.
Morsestraat 32, 6716 AH Ede,
The Netherlands
Tel: +31-318-648282
Fax: +31-318-648288
http://www.chromaeu.com
E-mail: sales@chromaeu.com

Worldwide Distribution and Service Network

Programmable
DC Electronic Load

PROGRAMMABLE DC ELECTRONIC LOAD
MODEL 63600 SERIES

Chroma's 63600 series DC electronic loads are designed for testing multi-output AC/DC power supplies, DC/DC converters, chargers, batteries, server power supplies, and power electronic components. They are excellent for research, development, production, and incoming inspection applications.

The 63600's state of the art design uses DSP technology to simulate non-linear loads using a unique CZ operation mode allowing realistic loading behavior.

The 63600 series can draw its rated current under very low voltage (0.4V typical). This unique feature guarantees the best loading performance for modern Point-of-Load conditions and fuel cells.

The 63600 series can simulate a wide range of dynamic loading applications, with programmable load levels, slew rates, duration, and conducting voltage. The 63600 also has a dynamic sweep function to meet the test requirements of ATX power supplies. The instrument allows up to 100 sets of system operating status which can be stored in the EEPROM and recalled instantly for automated testing application.
Real time measurement of voltage and current are integrated into each 63600 load module using a 16-bit measurement circuit with three current ranges. The user can perform online voltage measurements and adjustments or simulate short circuit tests using the simple keypad on the front panel.

With the VFD display and rotary knob, the 63600 loads offer versatile front panel operation. Users are able to control the 63600 family remotely via Ethernet, USB, or GPIB interface.

Also included in the 63600 are self-diagnostic routines and full protections against OP, OC, OT and alarm indicating OV, reverse polarity. This ensures the quality and reliability of the 63600 and provides protection to units under test.

Ethernet GPIB USB CE

MODEL 63600 SERIES

Key Features :

- Max. power : 100W×2(Dual), 300W & 400W
- Voltage range : up to 600V
- 5 module mainframe Max. 2000W, load modules up to 400W/ea
- Up to 10 channels in one mainframe, fit for testing multiple output SMPS
- 0.4V @ 80A (Typical) low voltage operating characteristics
- Flexible CC, CR, CV and CP operation modes
- CZ mode for turn on capacitive load simulation
- Parallel mode for high current and power application up to 2kW
- Multi channel synchronous control
- Auto frequency sweep up to 50kHz
- Real time power supply load transient response simulation and Vpk+/- measurement
- User defined waveform
- Max. Power Point Tracking
- User programmable 100 sequential front panel input status for user-friendly operation
- Precision voltage and current measurement
- Precision high speed digitizing measurement/ data capture
- Voltage, current and P_{max} measurement for OCP/OLP testing
- Timing measurement for batteries
- Short circuit simulation
- Self-test at power-on
- Full protection : OC, OP, OT protection and OV alarm
- Ethernet, USB and GPIB interfaces

Chroma

APPLICATIONS

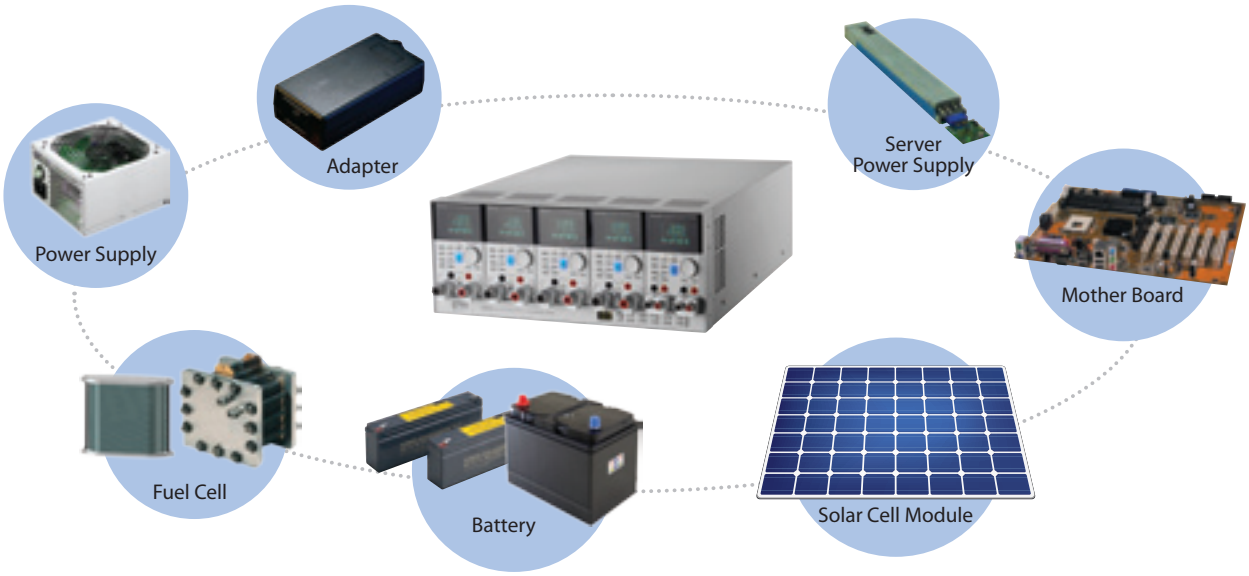

DUT \ Functionality														OCP
Electric Vehicle Components														
Battery	☀	☀		☀	☀	☀		☀	☀	☀	☀			
Charger		☀		☀					☀	☀	☀			☀
Generator		☀			☀	☀		☀	☀	☀				☀
Wiper current simulation		☀		☀				☀	☀	☀				☀
DC to DC converter	☀	☀	☀		☀	☀		☀	☀	☀	☀		☀	☀
Fuse		☀		☀		☀		☀	☀	☀	☀			
Relay		☀		☀		☀		☀	☀	☀	☀			
Connector		☀		☀		☀		☀	☀	☀	☀			
Body control module (BCM)		☀				☀		☀	☀	☀				
A/C controller		☀		☀				☀	☀	☀				
Storage power														
Battery	☀	☀		☀	☀	☀		☀	☀	☀	☀			☀
PV module		☀							☀	☀		☀		
Fuel cell	☀	☀		☀	☀	☀		☀	☀	☀	☀			☀
3C Products														
Adaptor		☀	☀	☀	☀				☀	☀	☀		☀	☀
Power supply		☀	☀	☀	☀	☀	☀	☀	☀	☀	☀		☀	☀
Server power		☀	☀	☀	☀	☀	☀	☀	☀	☀	☀		☀	☀
Printer power		☀	☀	☀	☀	☀		☀	☀	☀	☀		☀	☀
Charger		☀		☀		☀		☀	☀	☀	☀		☀	☀
VRM/POL	☀	☀		☀				☀	☀	☀			☀	☀
UPS		☀	☀	☀		☀		☀	☀	☀			☀	☀
Telecom power	☀	☀	☀	☀		☀	☀	☀	☀	☀	☀		☀	☀
DC to DC converter		☀	☀	☀	☀			☀	☀	☀	☀		☀	☀

- **Low Voltage Operating Characteristics**
  0.4V@80A (typical)
- **High Measurement Accuracy**
- **Dynamic Loading and Control**
  Up to 40 channels
- **Peak Current Test**
  (Programmable repetitive peak cycle)
- **Program Sequences**
- **Master / Slave Parallel Control**
- **Constant Impedance Mode (CZ mode)**
- **Sine Wave Dynamic Function**
- **Digitizing Function**
- **User Defined Waveform Function**
- **Timing Function**
- **Maximum Power Point Tracking Function**
- **Auto Sweep for Dynamic Loading Test**
- **Over Current Protection Test**

VERSATILE SYSTEM CONFIGURATION

Chroma's 63600 Series Programmable Electronic Load integrates micro-processing capability into each load module to optimize the speed and control among multiple load modules. All load modules are configured to work independently, though testing can be carried out simultaneously at multiple outputs via remote control to simulate real life application.

MODULE LOAD DESIGN

The Chroma 63600 electronic load mainframe accepts the user-installable 63600 series load modules for easy system configuration. The model 63600-5 mainframe holds five 63610 load modules to offer up to 10 100W load input channels with standard front-panel inputs. The maximum power for a single mainframe is 2kW when five 63640-80-80 load modules are paralleled. This is suitable for testing multiple output switch mode power supplies, and many other types of power products. Using the GO/NG output port, production snapshots are made available to show the immediate pass/fail judgment of UUT. All modules on the mainframe share a common GPIB address to synchronize and speed up the control of the load modules and read back the operating data.

APPLICATION OF SPECIFIC LOAD SIMULATION

The 63600 series load modules operate in constant voltage, current, resistance, power, or impedance to satisfy a wide range of test requirements. For example, the CV is designed to simulate batteries for charger testing.

Constant Current

CC Applications:

1. *Load/Cross regulation test for CV power supply*
2. *Battery discharge time test and life cycle test*
3. *Fuel cell testing*
4. *Loading pattern simulation for automotive wiper*

Constant Resistance



CR Applications:

1. *Test current limit point and slew rate for power supply*
2. *Soft start test for telecom power*
3. *Loading simulation for automotive temperature controller*

Constant Voltage



CV Applications:

1. *Charger test for mobile phone*
2. *Current limit test for fold back power supply*
3. *Fuel cell test.*
4. *Current source test*

Constant Power



CP Applications:

1. *CP power test*
2. *Battery capacity test and capacity life cycle test*
3. *Pout vs Eff% curve test*

PRECISE MEASUREMENTS

The 63600 series provides three operating current ranges and a built-in 16-bit, precision A/D converter, achieving 0.025%+0.01%F.S., 0.05%+0.05%F.S. and 0.1%+0.1%F.S. accuracy for voltage, current and power measurement respectively. Precise measurements like these are ideal for testing power efficiency and other critical parameters of the UUT's. The precise measurement of 63600 series also meets the requirements of ENERGY STAR® and 80 Plus.

Besides, The 63600 series can measure OCP/OLP trip voltage and current by setting the step, step current, dwell time and so on. Then 63600 series will judge the test result for Pass or Fail and shows the maximum power (Pmax) on the display after completed the OCP/OLP test.

Two high-speed A/D are built in the 63600 series to measure the voltage and current at the same time and calculate the true power value for displaying without distortion

CONSTANT IMPEDANCE MODE (CZ MODE)

The unique CZ mode designed in 63600 series can improve the loading behavior of CC & CP mode and makes the simulated loading current more realistic.



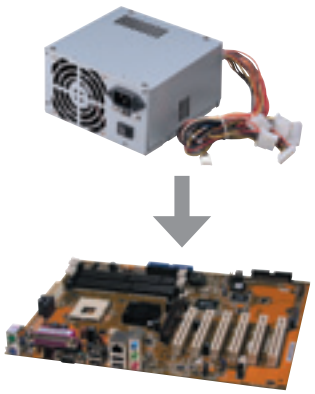

PROGRAM SEQUENCES

The 63600 series offers 100 programmable loading sequences that enable the user to simulate various real world conditions. In addition, each module can be operated independently or synchronized so that all modules start operating at the same time while running independent programs. Below are some examples of the most popular program sequences available.

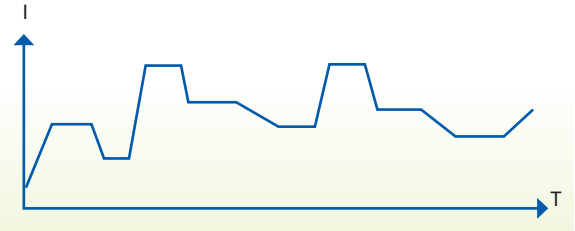

Simulations of all kinds of real current waveforms for battery discharge testing and other applications are possible. (Notebook, Electric car and Electric bike) (Single output channel for UUT)

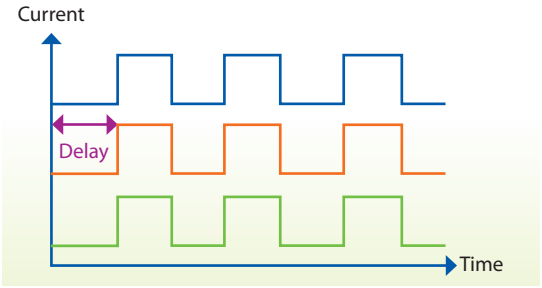

Peak power cycle test for printer power (Three output channel for UUT)

DYNAMIC LOADING AND CONTROL

Modern electronic devices operate at very high speed and demand rapid transient response characteristics. To address these applications the 63600 offers high speed, programmable dynamic loading, sweep simulation and control capability never before achieved. The right figure shows the programmable parameters which can be set within the 63600 loads: Waveforms can be single shot or set to repeat.

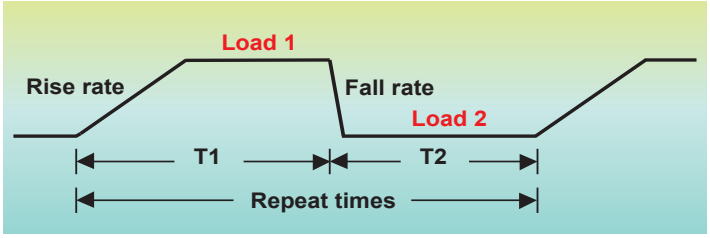

The dynamic mode provides a unique simulation capability allowing users to set the number of times each cycle repeats from 1~65,535. Feature is excellent for determining the peak current which can be sustained by converters.

The 63600 also offers a unique dynamic frequency sweep with variable frequencies up to 50kHz. This capability is ideal for determining worst case voltage peaks (see Figure 1). Measurement of the Vpeak (+/-) can be achieved by this function with a sampling rate of 500 kHz (Figure 2). The dynamic loading mode can simulate different loading conditions for most test requirements. Dedicated remote load sensors and control circuits guarantee minimum waveform distortion during dynamic loading.

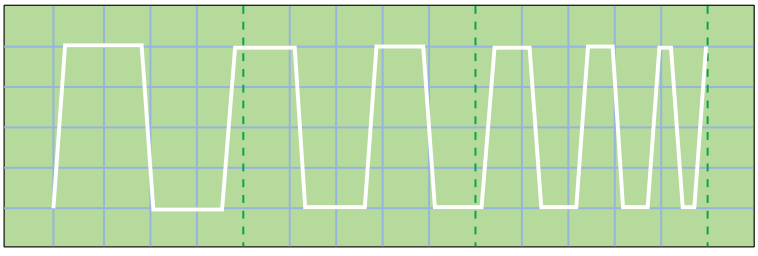

Figure 1 : Sweep Waveform

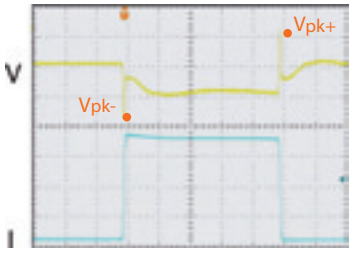

Figure 2 : Measurement of Vpeak

According to Intel’ s Design Guide for ATX 12V Power Supplies, measurement of output transient response requires simultaneous load steps when testing the power supply’ s +12VDC, +5VDC and +3VDC outputs (all steps must occur at the same time). The 63600 provides a dynamic synchronous function that can be used to perform this test on up to 10 outputs within each mainframe. The total dynamic synchronous channels can up to 40 when using 4 mainframes providing higher flexible and increased utility.

In addition to the dynamic loading function the 63600 provides Master/Slave (parallel) operation of individual loads. This capability provides for up to 2,000W per mainframe. Figure 3 shows the parallel synchronous dynamic loading and Figure 4 shows the parallel non-synchronous dynamic loading of previous designs. As show, the Vpeak value is significantly reduced and incorrect when using non-synchronous loading.

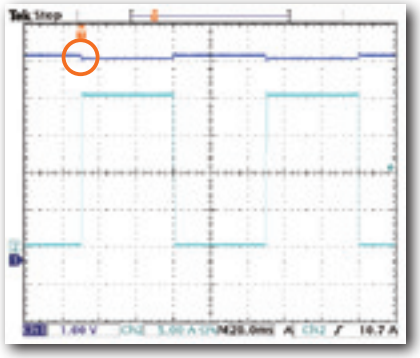

Figure 3 :
Parallel synchronous dynamic loading

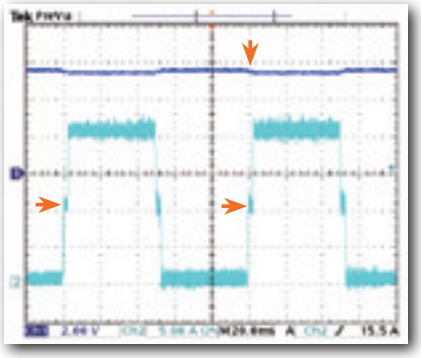

Figure 4 :
Parallel non-synchronous dynamic loading

MASTER / SLAVE PARALLEL CONTROL

When the need is for increased power, paralleling two or more loads can be done to achieve the desired load current. The 63600 provides the user with smart Master/Slave mode controls which enables the user to program the load currents of the Master and have them automatically calculated and downloaded to the slave modules. Using several loads in parallel to emulate a single load dramatically simplifies operation and allows the 63600 to be used for both multiple output power supplies and larger single output supplies. The 63600 can controlled and reconfigured with USB, Ethernet, and GPIB interfaces for automated testing applications.

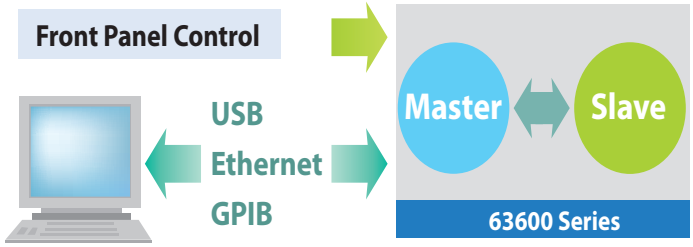

Application for High Power

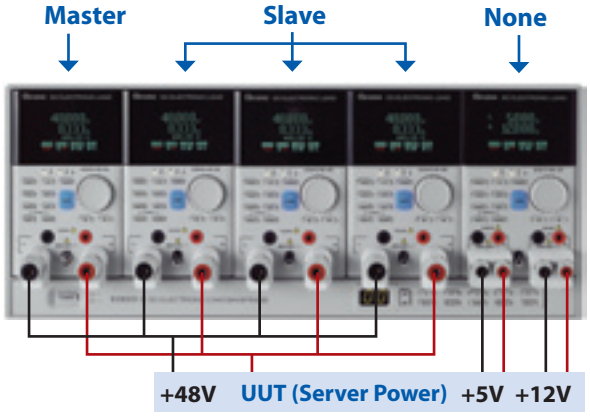

SINE WAVE DYNAMIC FUNCTION

The 63600 has a unique sine wave loading function which allows setting of a current bias (I_DC), a loading sine wave (I_AC) and sine wave frequency without the need for an external function generator. As see in the figure right, CH1 is the actual load current and CH2 is the voltage waveform of the UUT. This function can be used in D2D/ATX Power supplies for sine wave dynamic testing.

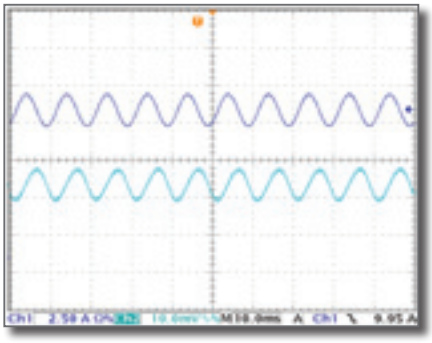

DIGITIZING FUNCTION

The 63600 offers a digitizing function that makes the load very convenient for recording transients in both voltage and current waveforms. The following are the specifications of setting parameters :

Sampling Time : 2µs to 40ms / R : 2µs (Setting the interval of sampling time)
Sampling Point : 1 to 4096 (Setting the total sampling points)

USER DEFINED WAVEFORM

In addition to common constant current, constant voltage, constant power and constant resistance modes of conventional loads, the 63600 accepts digital data from DAQ cards or analog data from function generators to allow for complex waveforms to be created as depicted below. The 63600 also provides an enhanced feature, User Defined Waveform (UDW), to simulate the actual current profiles and waveforms.

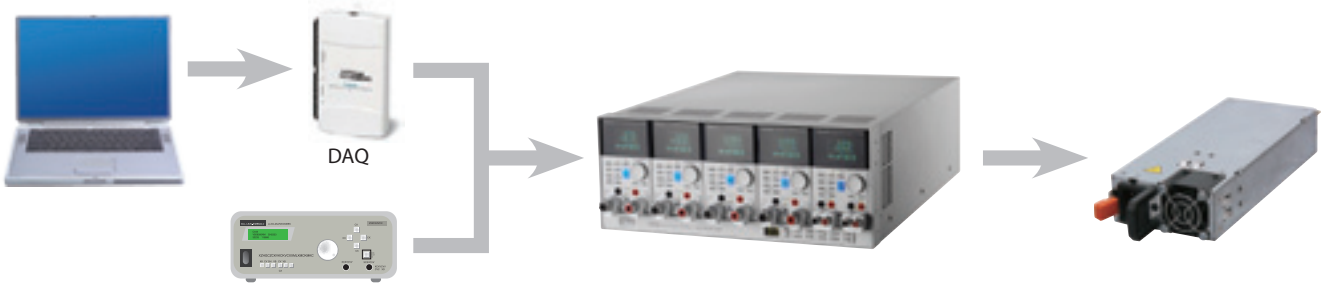

To reconstruct the actual current waveform, one can simply upload the captured waveform data into any module via a Chroma softpanel. Each module is capable of storing up to 10 sets of waveforms with each comprising up to 1.2 millions data points to meet the more strenuous test requirements.

In addition, 63600 series also provides voltage peak measurements during actual loading conditions. Avoiding the need for using an oscilloscope to capture the voltage peak, saving time and costs.

LOW VOLTAGE OPERATION

Each 63600 load module contains 3 load current ranges with a minimum full current operating voltage of 0.5V for each range. At the minimum voltage (0.4V), the 63640-80-80 load can draw maximum current defined by the current range. Based on this design, the 63600 is well suited for testing DC/DC converters, fuel cells, and other low voltage - high current devices. Low voltage operation is possible towards zero volts with corresponding reduced current levels (see de-rating curves).

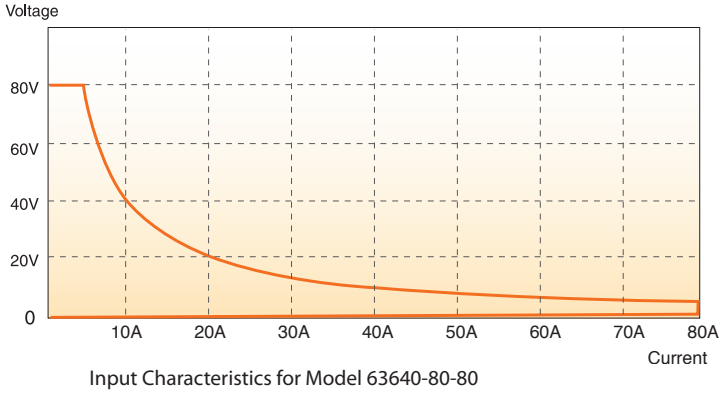

Input Characteristics for Model 63640-80-80

Low Voltage & V-I Curve Operating Characteristics
(Typical of 63600 Series)

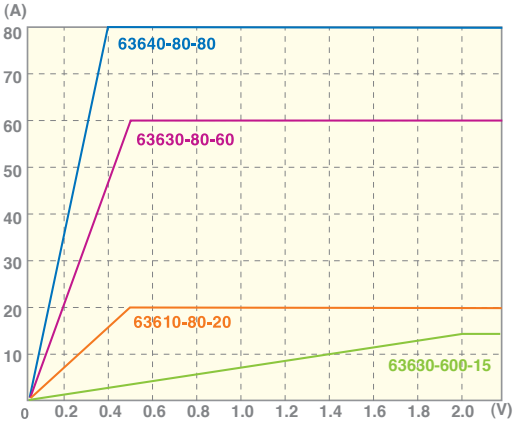

Note: All specifications are measured at load input terminals. (Ambient temperature of 25 ˚C)

TIMING FUNCTION

The 63600 loads include a unique timing & measurement function allowing precise time measurements in the range of 2ms to 100,000s. This feature allows users to set the final voltage & timeout values for battery discharge testing and other similar applications.

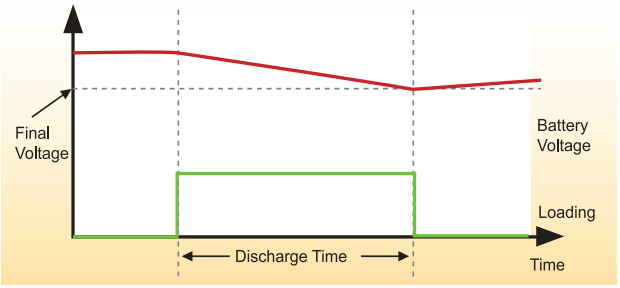

Figure 5 : Battery Discharge Testing

MPPT FUNCTION

The 63600 series loads also include built-in Maximum Power Point Tracking function which is used for solar panel test. Just connect the solar panel to the 63600 loads, the loads will track the maximum power point of solar panel using a high speed built-in algorithm. The 63600 can also calculate the consumption of energy automatically.

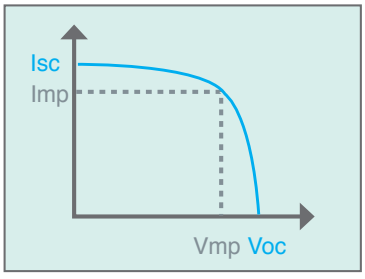

SOFT PANEL

The 63600 loads can be operated from the front panel controls or from available softpanels. This user friendly software includes all functions of 63600s and is easy to understand and operate. The 63600 can be controlled via GPIB, USB and Ethernet interfaces for remote control and automated testing applications.

Main Operation Menu

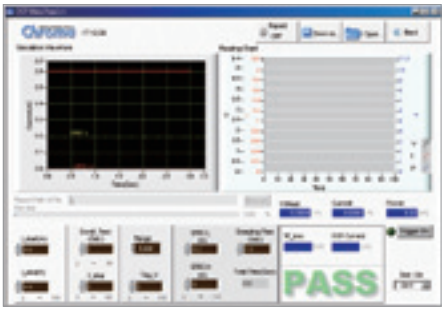

OCP Test

User Defined Waveform

Battery Discharge Test

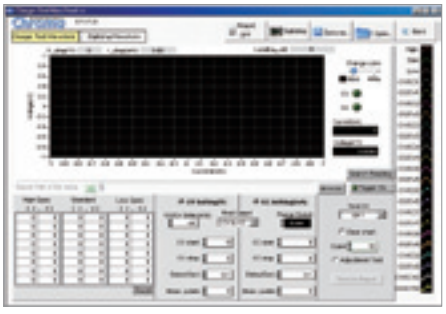

Charger Test

PANEL DESCRIPTION

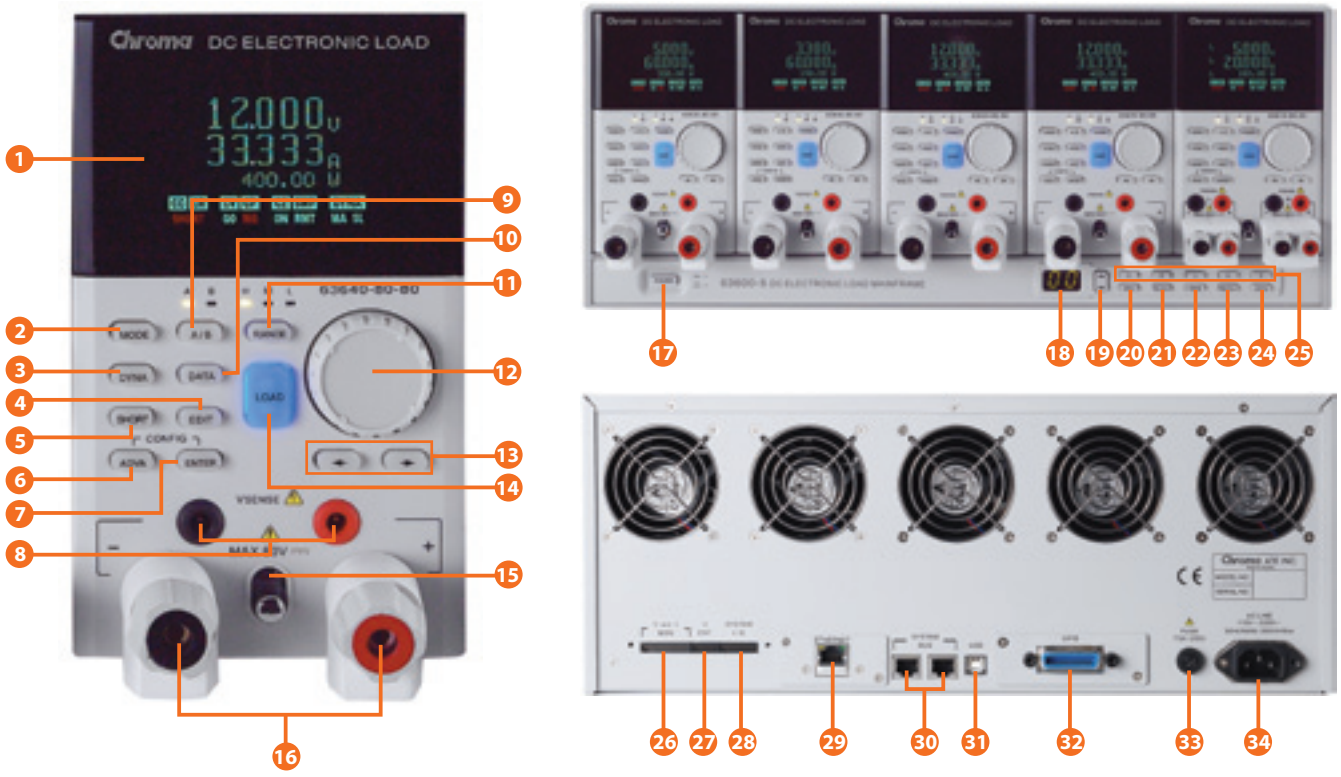

1. **LCD Display:** Used for setting and measurements
2. **MODE key:** Used to select the operating mode : CC, CR, CV, CP or CZ
3. **DYNA key:** To select dynamic test mode
4. **EDIT key:** Used for setting and editing
5. **SHORT key:** Used to apply a short circuit across the input
6. **ADVA key:** Used to select the other testing functions
7. **Enter key:** Used for confirming data entry
8. **Voltage sense terminal**
9. **A/B key:** Used to select static A or B load (63630, 63640)
   L/R key: Used to select left or right channel of input load (63610)
10. **DATA key:** Used to select the other parameters
11. **RANGE key:** Used to select HIGH, MIDDLE or LOW loading range
12. **Rotary knob:** Used to adjust loading and parameter setting
13. **Cursor key:** Used for setting and editing
14. **LOAD key:** Used to enable or disable the load input
15. **Module lock:** Used to remove the module
16. **Load terminal**
17. **Power switch**
18. **LED display:** Used to display the memory address
19. **Up / Down key:** Used to select the next or previous memory address
20. **SPEC key:** Used to setup High/Low limits for GO/NG test
21. **LOCK key:** Used to lock the setting data
22. **SAVE key:** Used to save the front panel input status into memory
23. **RECALL key:** Used to recall the front panel input status from memory
24. **LOCAL key:** Used to recover local control
25. **Shortcut key:** Used to save loading profile for all channels
26. **Voltage & Current monitor output:** Analog output to proportional to the voltage and current waveform
27. **V EXT:** Input for external wave in control
28. **System I/O:** Used for system input/output control signals
29. **Ethernet connector**
30. **System Bus:** Used for master/slave control system data communication
31. **USB connector**
32. **GPIB connector**
33. **AC input fuse**
34. **AC Input connector**

ORDERING INFORMATION

63600-1 : 63600 Mainframe for Single Modules
63600-2 : 63600 Mainframe for 2 Modules
63600-5 : 63600 Mainframe for 5 Modules
63610-80-20 : DC Load Module, 80V/20A/100Wx2
63630-80-60 : DC Load Module, 80V/60A/300W
63630-600-15 : DC Load Module, 600V/15A/300W
63640-80-80 : DC Load Module, 80V/80A/400W

A636000 : GPIB Interface for 63600-2/63600-5 Mainframe
A636001 : Ethernet Interface for 63600-2/63600-5 Mainframe
A636003 : External Signal Board (Test Pin) for 63600-2/63600-5 Mainframe
A636005 : External Signal Board (BNC) for 63600-2/63600-5 Mainframe
A636007 : Rack Mounting Kit for 63600-2 mainframe
A636008 : Rack Mounting Kit for 63600-5 mainframe (for Europe only)
A632006 : NI USB-6211 Bus-Powered Multifunction DAQ

MAINFRAME SPECIFICATION

Model	63600-1*	63600-2	63600-5
Number of slots	1 slot	2 slots	5 slots
Operating temperature	0~40˚C	0~40˚C	0~40˚C
Input Rating	1Ø 100~115V ± 10% V_{LN}, 1Ø 190~230V ± 10% V_{LN}, Switchable, 47~63Hz	1Ø 100~115V ± 10% V_{LN}, 1Ø 190~230V ± 10% V_{LN}, Switchable, 47~63Hz	1Ø 100~115V ± 10% V_{LN}, 1Ø 190~230V ± 10% V_{LN}, Auto Range, 47~63Hz
Mainframe dimension (HxWxD)	177x70.22x554.9mm / 7.0x2.76x21.8 inch	177x210x554mm / 7.0x8.27x21.8 inch	177x447x554mm / 7.0x17.6x21.8 inch (Full Rack)
Weight	7.5kg / 16.53lbs	11.5kg / 23.35lbs	15.6kg / 34.39lbs

* None digital interface option

SPECIFICATIONS-1

Model	63610-80-20			63630-80-60		
Configuration	100Wx2			300W		
Voltage *1 *8	0~80V			0~80V		
Current	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A
Power *2	0~16W	0~30W	0~100W	0~30W	0~60W	0~300W
Static Mode						
Typical Min. Operating Voltage (DC)	0.5V@0.2A	0.5V@2A	0.5V@20A	0.5V@0.6A	0.5V@6A	0.5V@60A
Constant Current Mode						
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A
Resolution	0.01mA	0.1mA	1mA	0.01mA	0.1mA	1mA
Accuracy	0.1%+0.1%F.S.			0.1%+0.1%F.S.		
Constant Resistance Mode						
Range	CRL : 0.04~80Ω (100W/6V) CRM: 1.44~2.9kΩ (100W/16V) CRH : 5.76~12kΩ (100W/80V)			CRL : 0.015~30Ω (300W/6V) CRM: 0.3~600Ω (300W/16V) CRH : 1.5~3kΩ (300W80V)		
Resolution *9	0.3288mS			0.9864mS		
Accuracy *3	0.1%+0.075S (6V) 0.1%+0.01S (16V) 0.1%+0.00375S (80V)			0.1%+0.2S (6V) 0.1%+0.03S (16V) 0.1%+0.01S (80V)		
Constant Voltage Mode						
Range	0~6V	0~16V	0~80V	0~6V	0~16V	0~80V
Resolution	0.1mV	1mV	1mV	0.1mV	1mV	1mV
Accuracy	0.05%+0.1%F.S.			0.05%+0.1%F.S.		
Constant Power Mode						
Range	0~2W	0~10W	0~100W	0~6W	0~30W	0~300W
Resolution *9	1mW	10mW	100mW	3.2mW	32mW	320mW
Accuracy *4	0.3%+0.3%F.S.			0.3%+0.3%F.S.		
Dynamic Mode - CC						
Min. Operating Voltage	1.5V			1.5V		
Frequency	100Hz~50kHz/0.01Hz~1kHz			100Hz~50kHz/0.01Hz~1kHz		
Duty	1~99% (Min. Rise Time Dominated)			1~99% (Min. Rise Time Dominated)		
Accuracy	1μs/1ms+100ppm			1μs/1ms+100ppm		
Slew Rate	0.04A/ms~0.02A/μs	0.4A/ms~0.2A/μs	4A/ms~2A/μs	0.12A/ms~0.06A/μs	1.2A/ms~0.6A/μs	12A/ms~6A/μs
Resolution	0.01mA/μs	0.1mA/μs	1mA/μs	0.01mA/μs	0.1mA/μs	1mA/μs
Accuracy	10% ±20μs			10% ±20μs		
Min. Rise Time	10 μs			10 μs		
Current						
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A
Resolution	0.01mA	0.1mA	1mA	0.01mA	0.1mA	1mA
Ext Wave Mode(20kHz) : CC						
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A
Level	0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.		

• Continued on next page ➟

SPECIFICATIONS-1

Measurement						
Voltage Read Back						
Range	0~6V	0~16V	0~80V	0~6V	0~16V	0~80V
Resolution	0.1069mV	0.2849mV	1.3537mV	0.1069mV	0.2849mV	1.3537mV
Accuracy *5	0.025%+0.01%F.S.		0.01%+ 0.025%F.S.	0.025%+0.01%F.S.		0.01%+ 0.025%F.S.
Current Read Back						
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A
Resolution	0.003349mA	0.034628mA	0.329561mA	0.009942mA	0.101748mA	1.009878mA
Accuracy *5	0.05%+0.05%F.S.			0.05%+0.05%F.S.		
Power Read Back						
Range	0~16W	0~30W	0~100W	0~30W	0~60W	0~300W
Accuracy *5	0.1%+0.1%F.S.			0.1%+0.1%F.S.		
Voltage Monitor						
Bandwidth	20 kHz			20 kHz		
Range	0~6V	0~16V	0~80V	0~6V	0~16V	0~80V
Output	0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.		
Current Monitor						
Bandwidth	20 kHz			20 kHz		
Range	0~0.2A	0~2A	0~20A	0~0.1A	0~1A	0~10A
Output	0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.		
General						
Program mode						
Sequence No.	100/Program			100/Program		
Dwell / SEQ	0.1ms ~ 30s (Resolution : 0.1ms)			0.1ms ~ 30s (Resolution : 0.1ms)		
Load Setting	Refer to Static mode specifications			Refer to Static mode specifications		
Spec Check	Voltage/Current/Power			Voltage/Current/Power		
Protection						
Over Power	Yes			Yes		
Over Current	Yes			Yes		
Over Voltage Alarm*8	Yes			Yes		
Over Temperature	Yes			Yes		
Reverse	Yes			Yes		
Interface						
USB	Standard			Standard		
Ethernet	Optional			Optional		
GPIB	Optional			Optional		
System BUS	Master/Slave			Master/Slave		
Dout						
No. of bits	2 bits per mainframe			2 bits per mainframe		
Level - H	1.8V/3.3V/5V switchable			1.8V/3.3V/5V switchable		
Level - L	<0.6V@I_{sink}=10mA			<0.6V@I_{sink}=10mA		
Drive	Pull_up resistor = 4.7kΩ			Pull_up resistor = 4.7kΩ		
Din (TTL Compatible, Rising Edge)						
No. of bits	2 bits per mainframe			2 bits per mainframe		
External Trig. for Digitizing						
No. of bits	1 bit per mainframe			1 bit per mainframe		
External Trig. for Auto Sequences (TTL Compatible, Rising Edge)						
No. of bits	1 bit per mainframe			1 bit per mainframe		
Load ON - O/P						
Level	TTL Compatible, Level, Active High			TTL Compatible, Level, Active High		
Short ON - O/P						
No. of channels	2 channels per 63600-1 mainframe 4 channels per 63600-2 mainframe 10 channels per 63600-5 mainframe			2 channels per 63600-1 mainframe 4 channels per 63600-2 mainframe 10 channels per 63600-5 mainframe		
Level	TTL Compatible, Level, Active High			TTL Compatible, Level, Active High		
Short circuit						
Current *6	Set to 100% of rated current			Set to 100% of rated current		
Input Resistance (Load Off)	700kΩ (Typical)			700kΩ (Typical)		
Dimensions (HxWxD)	142x86x514mm / 5.6x3.4x20.2 inch			142x86x514mm / 5.6x3.4x20.2 inch		
Weight	5kg / 11 lbs			4kg / 8.8 lbs		
Operating Temperature	0~40˚C			0~40˚C		
Storage Temperature	-20~80˚C			-20~80˚C		
Power	Supply from mainframe			Supply from mainframe		
EMC & Safety	CE			CE		

SPECIFICATIONS-2

Model	63630-600-15			63640-80-80		
Configuration	300W			400W		
Voltage *1 *8	0~600V			0~80V		
Current	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A
Power *2	0~90W	0~300W	0~300W	0~60W	0~60W	0~400W
Static Mode						
Typical Min. Operating Voltage (DC)	2V@0.15A	2V@1.5A	2V@15A	0.4V@0.8A	0.4V@8A	0.4V@80A
Constant Current Mode						
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A
Resolution	0.005mA	0.05mA	0.5mA	0.01mA	0.1mA	1mA
Accuracy	0.1%+0.1%F.S.			0.1%+0.1%F.S.		
Constant Resistance Mode						
Range	CRL : 0.133~270Ω (300W/80V) CRM: 1.92~4kΩ (300W/150V) CRH: 208~200kΩ (300W/600V)			CRL : 0.01~20Ω (400W/6V) CRM: 0.36~720Ω (400W/16V) CRH : 1.45~2.9kΩ (400W/80V)		
Resolution *9	0.2435mS			1.322mS		
Accuracy *3	0.1%+0.02S (80V) 0.1%+0.0005S (150V) 0.1%+0.0003S (600V)			0.1%+0.275S (6V) 0.1%+0.036S (16V) 0.1%+0.01375S (80V)		
Constant Voltage Mode						
Range	0~80V	0~150V	0~600V	0~6V	0~16V	0~80V
Resolution	1mV	10mV	10mV	0.1mV	1mV	1mV
Accuracy	0.05%+0.1%F.S.			0.05%+0.1%F.S.		
Constant Power Mode						
Range	0~6W	0~30W	0~300W	0~8W	0~40W	0~400W
Resolution *9	5.625mW	56.25mW	562.5mW	4mW	40mW	400mW
Accuracy *4	0.3%+0.3%F.S.			0.3%+0.3%F.S.		
Dynamic Mode - CC						
Min. Operating Voltage	3V			1.5V		
Frequency	100Hz~50kHz/0.01Hz~1kHz			100Hz~50kHz/0.01Hz~1kHz		
Duty	1~99% (Min. Rise Time Dominated)			1~99% (Min. Rise Time Dominated)		
Accuracy	1μs/1ms+100ppm			1μs/1ms+100ppm		
Slew rate	0.03A/ms~0.015A/μs	0.3A/ms~0.15A/μs	3A/ms~1.5A/μs	0.16A/ms~0.08A/μs	1.6A/ms~0.8A/μs	16A/ms~8A/μs
Resolution	0.005mA/μs	0.05mA/μs	0.5mA/μs	0.01mA/μs	0.1mA/μs	1mA/μs
Accuracy	10% ±20μs			10% ±20μs		
Min. Rise Time	10 μs			10 μs		
Current						
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A
Resolution	0.005mA	0.05mA	0.5mA	0.01mA	0.1mA	1mA
Ext Wave Mode(20kHz) : CC						
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A
Level	0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.		
Measurement						
Voltage Read Back						
Range	0~80V	0~150V	0~600V	0~6V	0~16V	0~80V
Resolution	1.4194mV	2.661mV	10.645mV	0.1069mV	0.2849mV	1.3537mV
Accuracy *5	0.025%+0.01%F.S.		0.01%+ 0.025%F.S.	0.025%+0.01%F.S.		0.01%+ 0.025%F.S.
Current Read Back						
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A
Resolution	0.00275mA	0.0266mA	0.255mA	0.013695mA	0.138766mA	1.31406mA
Accuracy *5	0.05%+0.05%F.S.			0.05%+0.05%F.S.		
Power Read Back						
Range	0~90W	0~300W	0~300W	0~60W	0~60W	0~400W
Accuracy *5	0.1%+0.1%F.S.			0.1%+0.1%F.S.		
Voltage Monitor						
Bandwidth	20 kHz			20 kHz		
Range	0~80V	0~150V	0~600V	0~6V	0~16V	0~80V
Output	0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.		
Current Monitor						
Bandwidth	20 kHz			20 kHz		
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A
Output	0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.		

• Continued on next page ➟

SPECIFICATIONS-2

General		
Program mode		
Sequence No.	100/Program	100/Program
Dwell / SEQ	0.1ms ~ 30s (Resolution : 0.1ms)	0.1ms ~ 30s (Resolution : 0.1ms)
Load Setting	Refer to Static mode specifications	Refer to Static mode specifications
Spec Check	Voltage/Current/Power	Voltage/Current/Power
Protection		
Over Power	Yes	Yes
Over Current	Yes	Yes
Over Voltage Alarm*8	Yes	Yes
Over Temperature	Yes	Yes
Reverse	Yes	Yes
Interface		
USB	Standard	Standard
Ethernet	Optional	Optional
GPIB	Optional	Optional
System BUS	Master/Slave	Master/Slave
Dout		
No. of bits	2 bits per mainframe	2 bits per mainframe
Level - H	1.8V/3.3V/5V switchable	1.8V/3.3V/5V switchable
Level - L	<0.6V@I_{sink}=10mA	<0.6V@I_{sink}=10mA
Drive	Pull_up resistor = 4.7kΩ	Pull_up resistor = 4.7kΩ
Din (TTL Compatible, Rising Edge)		
No. of bits	2 bits per mainframe	2 bits per mainframe
External Trig. for Digitizing		
No. of bits	1 bit per mainframe	1 bit per mainframe
External Trig. for Auto Sequences (TTL Compatible, Rising Edge)		
No. of bits	1 bit per mainframe	1 bit per mainframe
Load ON - O/P		
Level	TTL Compatible, Level, Active High	TTL Compatible, Level, Active High
Short ON - O/P		
No. of channels	2 channels per 63600-1 mainframe 4 channels per 63600-2 mainframe 10 channels per 63600-5 mainframe	2 channels per 63600-1 mainframe 4 channels per 63600-2 mainframe 10 channels per 63600-5 mainframe
Level	TTL Compatible, Level, Active High	TTL Compatible, Level, Active High
Short circuit		
Current *6	Set to 100% of rated current	Set to 100% of rated current
Input Resistance (Load Off)	2MΩ (Typical)	700kΩ (Typical)
Dimensions (HxWxD)	142x86x514mm / 5.6x3.4x20.2 inch	142x86x514mm / 5.6x3.4x20.2 inch
Weight	5kg / 11 lbs	4.5kg / 9.9 lbs
Operating Temperature	0~40˚C	0~40˚C
Storage Temperature	-20~80˚C	-20~80˚C
Power	Supply from mainframe	Supply from mainframe
EMC & Safety	CE	CE

NOTE*1 : The maximum current loading below the minimum operating voltage (0.5V) will follow a derating curve.
NOTE*2 : The 400W power rating of the 63640-80-80 specified at an ambient temperature of 35˚C, please refer to the power rating curve on the right.
NOTE*3 : Does not apply to setting current < 0.25% full scale current in high range. Does not apply to setting current < 0.05% full scale current in low and middle range.
NOTE*4 : The full scale is Vmax x Imax.
NOTE*5 : The DC level measurements are made over a period of 20ms, and does not measure any transient signals in the DC measurements.
NOTE*6 : Its limits are the maximum power and maximum current of the current ragne.
NOTE*7 : The 63600 is guaranteed to meet specified performance at temperature range of 25±5˚C.
NOTE*8 : If the operating voltage exceeds the rated voltage for 1.1 times, it would cause permanent damage to the device.
NOTE*9 : Please refer to user's manual for detail specifications, and S (siemens) is the SI unit of conductance, equal to one reciprocal ohm.

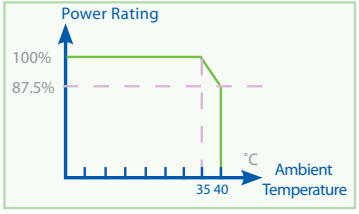

Developed and Manufactured by :
CHROMA ATE INC.
致茂電子股份有限公司
HEADQUARTERS
66 Hwaya 1st Rd., Kueishan
Hwaya Technology Park,
Taoyuan County 33383,
Taiwan
Tel: +886-3-327-9999
Fax: +886-3-327-8898
http://www.chromaate.com
E-mail: info@chromaate.com

CHINA
CHROMA ELECTRONICS (SHENZHEN) CO., LTD.
8F, No.4, Nanyou Tian An
Industrial Estate, Shenzhen,
China PC: 518052
Tel: +86-755-2664-4598
Fax: +86-755-2641-9620

JAPAN
CHROMA JAPAN CORP.
472 Nippa-cho, Kouhoku-ku,
Yokohama-shi, Kanagawa,
223-0057 Japan
Tel: +81-45-542-1118
Fax: +81-45-542-1080
http://www.chroma.co.jp
E-mail: info@chromaate.com

U.S.A.
CHROMA SYSTEMS SOLUTIONS, INC.
19772 Pauling,
Foothill Ranch, CA 92610
Tel: +1-949-600-6400
Fax: +1-949-600-6401
http://www.chromausa.com
E-mail: sales@chromausa.com

EUROPE
CHROMA ATE EUROPE B.V.
Morsestraat 32, 6716 AH Ede,
The Netherlands
Tel: +31-318-648282
Fax: +31-318-648288
http://www.chromaeu.com
E-mail: sales@chromaeu.com

Worldwide Distribution and Service Network